McCULLOCH DR-950

Australian made for Australian conditions!

Truck or track mounted, the DR-950 is a true multi-purpose machine and is an efficient operator for diamond coring, rotary or RC drilling.

STANDARD SPECIFICATIONS


MAIN WINCH	10,000kg
RETRACT FORCE	12,000kg
RETRACT SPEED	23m/min
PULL DOWN FORCE	6,000kg
PULL DOWN SPEED	20m/min
HEAD STROKE	7.2M
KW	205KW@2500RPM
ENGINE	CUMMINS DIESEL QSB6.7
MAX ROTATION	1400RPM
ROTATION TORQUE	5100Nm @ 0-120 ^{RPM}

*DEPTH CAPABILITY

PWL (114.3mm)	Up to 550m
HWL (88.9mm)	Up to 950m
NWL (69.9mm)	Up to 1250m

BASIC RIG DIMENSIONS (approx)

	· · · · · · · · · · · · · · · · · · ·		
OA LENGTH	12.2M		
OA WIDTH	2.45M		
OA TRANSPORT HEIGHT	4.2M		
HEIGHT (MAST RAISED VERTICALLY)	12.2M		
DRY WEIGHT (RIG ONLY)	14T		

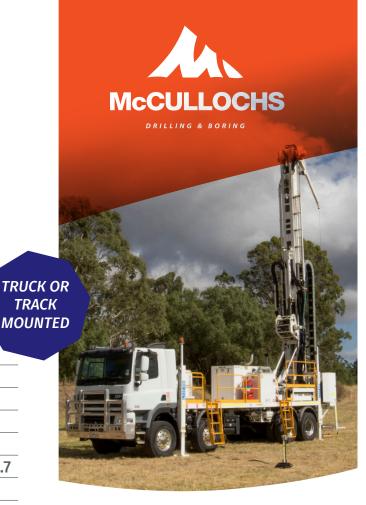

STANDARD EQUIPMENT

TOP HEAD DRIVE
CLOSED LOOP ROTATION
SYSTEM
HYDRAULIC FOOTCLAMP
DUMP MAST WITH 45°
CAPACITY
HIGH PRESSURE FMC PUMP
FOLD DOWN CATWALKS,
HANDRAILS & LADDERS
ROD GUARD C/W SLOW
ROTATION DETENT
JIB CRANE 250KG CAPACITY

OPTIONAL EXTRAS

KWL ROD LOADER
ON BOARD COMPRESSOR
ROD RACK
ON BOARD MUD PUMPS
WIRELESS CONTROL
DATA LOGGING WITH
REMOTE ACCESS
MORE OPTIONS AVAILABLE

*Under normal drilling conditions



Call: +61 3 5445 6900 Email: sales@mccullochs.com.au Visit: mccullochsdrilling.com.au





DR950 Spec sheet v2.indd 1 6/9/19 10:16 am